





Excavation Moratorium – Street Restoration Requirements


Restoration on streets under an excavation moratorium must adhere to the following requirements as described below in addition to conformance with City Standard Details.

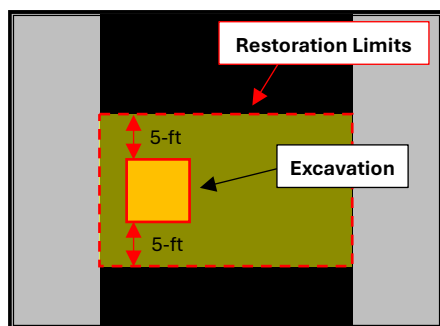

Restoration limits on a street without a continuous centerline

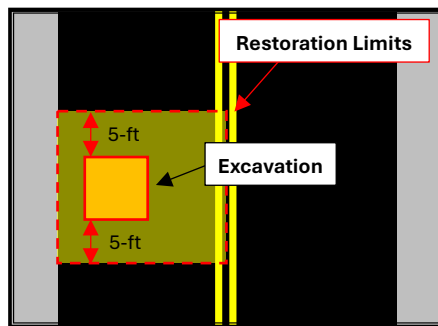

Restoration limits on a street with a continuous centerline

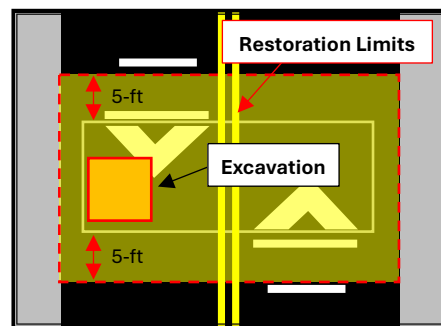

Restoration limits on a street with a speed hump/table

Slurry Seal Streets

- After standard site restoration, a slurry seal treatment must be conducted. 2-in grind & overlay may be substituted for a slurry seal treatment.
- Slurry seal shall extend a minimum 5-ft in each longitudinal direction of the trench/excavation limit and:
 - Where there is no continuous centerline, must be curb-to-curb in width; **or**
 - Where there is a continuous centerline, must be conducted curb-to-centerline in width.

Grind & Overlay Streets

- A minimum 2-in depth grind & overlay is required; it must extend a minimum 5-ft in each longitudinal direction of the trench/excavation limit and:
 - Where there is no continuous centerline, must be curb-to-curb in width; **or**
 - Where there is a continuous centerline, must be conducted curb-to-centerline in width.
- Where a speed hump/table is impacted, the longitudinal direction must include the entirety of the speed hump/table, 5-feet in each longitudinal direction, and curb-to-curb in width regardless of whether a continuous centerline is present.
- Grind & overlay depth is at the discretion of the Public Works Department and a deeper section may be required depending on site and cross-section conditions.

City of Albany

Excavation Moratorium – Street Restoration Requirements

Reconstructed or Cold In-Place Recycled Streets

- Coordinate directly with the Public Works Department.
- Expect to adhere to Grind & Overlay Streets requirements, at minimum, in addition to conditions set forth directly via Public Works Department coordination.
 - Additional requirements may include, but are not limited to, full depth pavement restoration and controlled low strength material backfill.



ALBANY CALIFORNIA

540 Cleveland Avenue, Albany, CA 94710 | albanycalifornia.gov

Public Works

Streets	Limits		Type of Construction	Moratorium Begins	Moratorium Ends
Adams Street	Solano Avenue	Buchanan Street	Reconstruct	Dec 2021	Dec 2026
Carmel Avenue	Washington Avenue	Marin Avenue	3" to 4" AC grind and overlay	Apr 2023	Apr 2028
Cerrito Street	Hillside Avenue	Buchanan Street	Slurry Seal	Apr 2024	Apr 2027
Cornell Avenue	Dartmouth Street	City Limit (Berkeley)	Slurry Seal	Apr 2024	Apr 2027
Cornell Avenue	Marin Avenue	Dartmouth Avenue	2" grind and overlay (EBMUD)	Oct 2022	Oct 2027
Cornell Avenue	Washington Avenue	Marin Avenue	3" AC grind and overlay	Apr 2023	Apr 2028
Curtis Street	City Limit (Kensington)	Washington Avenue	Slurry Seal	Apr 2024	Apr 2027
Dartmouth Street	San Pablo Avenue	Cornell Avenue	2" grind and overlay (EBMUD)	Oct 2022	Oct 2027
Evelyn Avenue (Southbound)	Solano Avenue	Dartmouth Street	4" AC grind and overlay	Apr 2023	Apr 2028
Fillmore Street	Solano Avenue	Buchanan Street	Slurry Seal	Apr 2024	Apr 2027
Francis Street	Santa Fe Avenue	Peralta Avenue	Slurry Seal	Apr 2024	Apr 2027
Garfield Avenue	Kains Avenue	Masonic Avenue	Slurry Seal	Apr 2024	Apr 2027
Gateway Avenue	North End	Washington Avenue	Slurry Seal	Apr 2024	Apr 2027
Hillside Avenue	North End	Jackson Street	Slurry Seal	Apr 2024	Apr 2027
Jackson Street	North End	Washington Avenue	3" to 4" AC grind and overlay	Apr 2023	Apr 2028
Jackson Street	Washington Avenue	Solano Avenue	Slurry Seal	Apr 2024	Apr 2027
Johnson St	Cleveland Avenue	Pierce Street	Slurry Seal	Apr 2024	Apr 2027
Kains Avenue	Marin Avenue	City Limit (Berkeley)	4" AC grind and overlay	Apr 2023	Apr 2028
Key Route Boulevard	Solano Avenue	Santa Fe Avenue	Slurry Seal	Apr 2024	Apr 2027
Madison Street	North End	Buchanan Street	Slurry Seal	Apr 2024	Apr 2027
Marin Avenue	Cornell Avenue	Key Route Boulevard	Reconstruct and 3" mill and overlay	May 2023	May 2028
Marin Avenue	Key Route Boulevard	City Limit (Berkeley)	2" AC grind and overlay over 2" CIR	Apr 2026	Apr 2031



ALBANY CALIFORNIA

540 Cleveland Avenue, Albany, CA 94710 | albanycalifornia.gov

Public Works

Streets	Limits		Type of Construction	Moratorium Begins	Moratorium Ends
Masonic Avenue (Southbound)	Portland Avenue	Washington Avenue	2" AC grind and overlay	Apr 2023	Apr 2028
Masonic Avenue	Washington Avenue	Solano Avenue	2" AC grind and overlay	Apr 2023	Apr 2028
Masonic Avenue	Solano Avenue	Marin Avenue	2" AC grind and overlay	May 2023	May 2028
Masonic Avenue	Dartmouth Street	City Limit (Berkeley)	Slurry Seal	Apr 2024	Apr 2027
Ordway Street	Solano Avenue	Marin Avenue	Slurry Seal	Apr 2024	Apr 2027
Pierce Street	City Limit (Richmond)	Buchanan Street	Slurry Seal	Apr 2024	Apr 2027
Polk Street	Washington Avenue	Buchanan Street	Slurry Seal	Apr 2024	Apr 2027
Pomona Avenue	City Limit (El Cerrito)	Thousand Oaks Boulevard	Slurry Seal	Apr 2024	Apr 2027
Pomona Avenue	Portland Avenue	Washington Avenue (S)	Slurry Seal	Apr 2024	Apr 2027
Ramona Avenue	Portland Avenue	Santa Fe Avenue	Slurry Seal	Apr 2024	Apr 2027
Stannage Avenue	Brighton Avenue	Washington Avenue	Slurry Seal	Apr 2024	Apr 2027
Stannage Avenue	Marin Avenue	Dartmouth Avenue	2" grind and overlay (EBMUD)	Oct 2022	Oct 2027
Taft Avenue	North End	Hillside Avenue	Slurry Seal	Apr 2024	Apr 2027
Taylor Street	Solano Avenue	Buchanan Street	Slurry Seal	Apr 2024	Apr 2027
Tevlin Street	Francis Street	South End	Slurry Seal	Apr 2024	Apr 2027
Thousand Oaks Boulevard	Key Route Boulevard	City Limit (Berkeley)	Slurry Seal	Apr 2024	Apr 2027
Ventura Avenue	Marin Avenue	Sonoma Avenue	Slurry Seal	Apr 2024	Apr 2027
Visalia Avenue	Curtis Street	City Limit (Berkeley)	Slurry Seal	Apr 2024	Apr 2027
Washington Avenue	Pierce Street	Jackson Street	Slurry Seal	Apr 2024	Apr 2027
Washington Avenue	Cornell Avenue	Masonic Avenue	6" AC grind and overlay	Apr 2022	Apr 2027
Washington Avenue	Pomona Avenue	City Limit (Berkeley)	Slurry Seal	Apr 2024	Apr 2027



Excavation Moratorium Streets



Note: if there is a discrepancy between this map and the table, contact Public Works for clarification.

Date: 8/3/2026